A2 bank account inquiry and passbook printing touchscreen kiosk
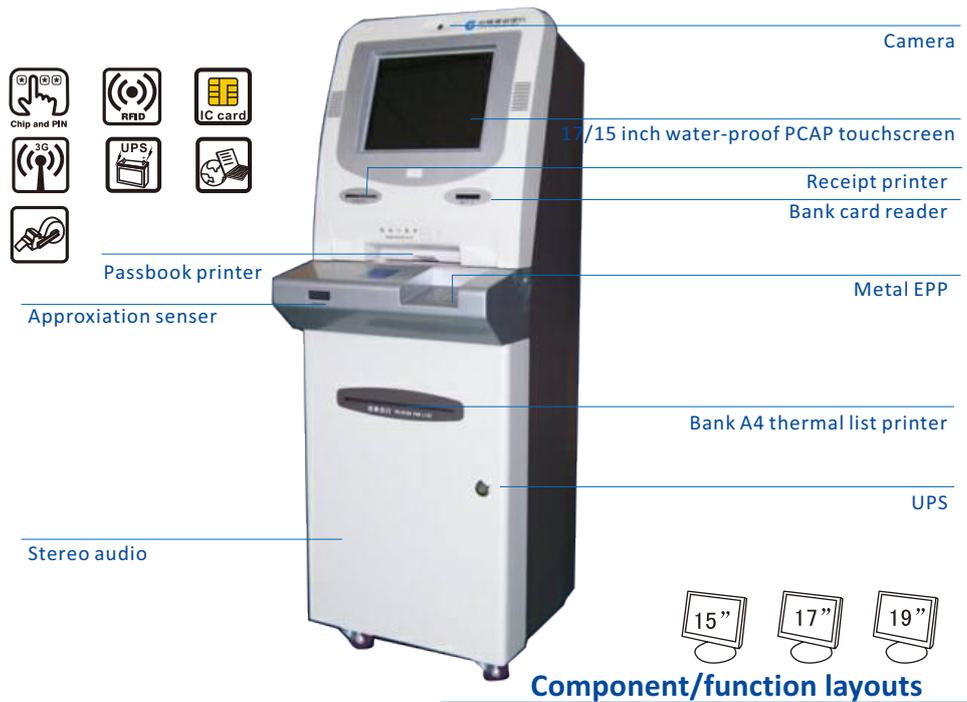
Banking Kiosk

A2

Chip and PIN | RFID | IC card
3G | UPS

Camera
17/15 inch water-proof PCAP touchscreen
Receipt printer
Bank card reader
Metal EPP
Passbook printer
Approxiation senser
Bank A4 thermal list printer
UPS
Stereo audio

Applications

Passbook printing
A4 bank account list printing
Bank card cashless transaction
Credit card payment
Utility bill collection
Information ads

15" 17" 19"

Component/function layouts

Features

1. Powerful up-to-date CPU;

2. Waterproof CA/IR/SAW touchscreen;

3. High quality bank passbook printers;

4. DES EPP with motorized card reader;

5. Fast A4 thermal list printer;

6. CUSTOM receipt printer

7. All steel sleek anti graffiti enclosure

Specifcations

Model Name	A2APN17CCB2	A2CPN-MSC19
Processor	2.5GHz Intel® Core™ i5-4210U	3.1GHz Intel® XEON™ E3-1285L V3(fan)
RAM	4Gb DDR III(16G max)	4Gb DDRIII(4G max)
HDD	64G SSD and 500G 7200rpm 3.5" hard driver Up to 3TB size	
Monitor	17" LCD with DX9 decoding acceleration	19" LCD with DX9 decoding acceleration
Touchscreen	Water proof CA/IR/SAW touchscreen	
Receipt printer	CUSTOM TG2480	CUSTOM TG2480
Dotmatrix printer	Nantian PR9E passbook printer	
Metal EPP	MKP2910SEA-PCI5	
Cash acceptor(optional)	CASHCODE SM	MEI SC83L
List printer	(None)	KM216
Motorized card reader	Rm6 hybrid card reader for IC, Magnetic and M1 cards	
3G/GPRS Modem(optional)	Simemse MC55/52 GPRS dual band SMS modem	
UPS	SANTAK K1000 PRO UPS for at least 15 mins of power	
Audio	Bi-stereo channel 2X3W speakers	
Enclosure	Durable all-steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate with drawers Security lock with crossbars Moistureproof,Antirust,Anti-acid,Static free Dimensions: 45-56cm * 45-66cm * 145-165cm	
Rear I/O Connectors	Power Jack Fuse(3A) Main power switch Host PC Power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45	
Fans	110 or 220 V AC selective Operation noise level: <45dB	
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A	
Operating System	XP, WIN 7, WinCE, XPe, WES, Linux2.6/3.1, Ubuntu, Fedora	
Operating Temperature	0°C up to 45°C(need heater in below 0°C environment)	
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)	

CE FC
RoHS COMPLIANT

Ver: A2 1.02