

Outdoor digital signage

Outdoor signage


W1

Applications

Museum
Exhibition
Apps store
Presentation
Information kiosk

Features

1. Industrial host computer
2. High brightness HD LCD;
3. Full view angle IPS display;
4. Outdoor all steel anti-graffiti enclosure

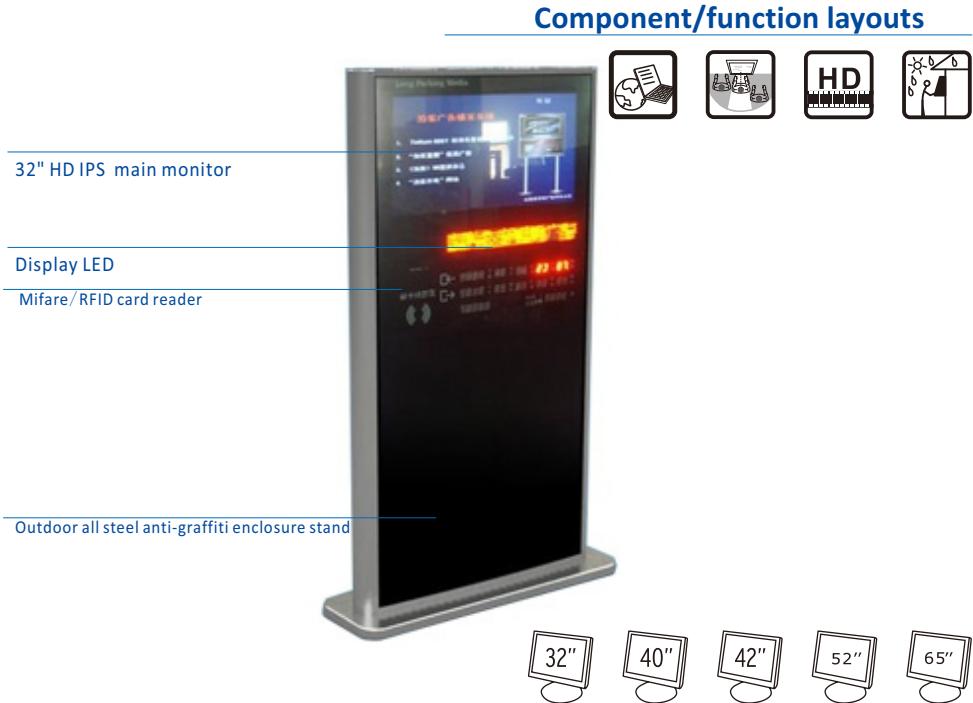

Specifications

Part Name	W1A-32J1800V2
Processor	Intel Bay trail J1800
Display	32" LCD display with LED backlight
Contactless(optionao)	ISO14443 Type A Mifare one/64bits,Manchester RFID card reader
LED display	Resolution: 256x32 Brightness: >3000 nits
Rear I/O Connectors	Power Jack Fuse(3A) Power switch Host computer Power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45
Fans	110 or 220 V AC selective Operation noise level: <45dB
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A
Operating System	WINDOWS XP/7/Linux 2.6 distribution(i.e. Fedora 9, CentOS 5, Ubuntu 10 and SUSE etc)
Operating Temperature	0°C up to 50°C(need heater in below 0°C environment)
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)



ZKTEK