


Touchscreen internet bank payment kiosk with metal keyboard, dip card reader and thermal printer



Internet bank Kiosk

H1

Applications

- Queue management
- Receipt printing
- Credit card payment
- Music vending
- Information ads


Features

1. Powerful up-to-date CPU;
2. Waterproof curved touchscreen;
3. Easy-to-swap interface;
4. Sleek and slim design;
5. All in one media card reader;
6. All steel sleek anti graffiti enclosure

A4 laser printer	HP LaserJet1008 laser printer
------------------	-------------------------------

RFID reader	ZKTEK R3
Ticket printer	ZKTEK P58C thermal printer, thickness:80-110g/m2(optional)
Credit/Debit card R’	ZKTEK R1
EPP metal keypad(optional)	

GPRS Modem	Simemse MC55 GPRS dual band SMS modem
UPS	SANTAK K500 PRO UPS for at least 5 mins of power
Audio	Bi-stereo channel 2X10W speakers

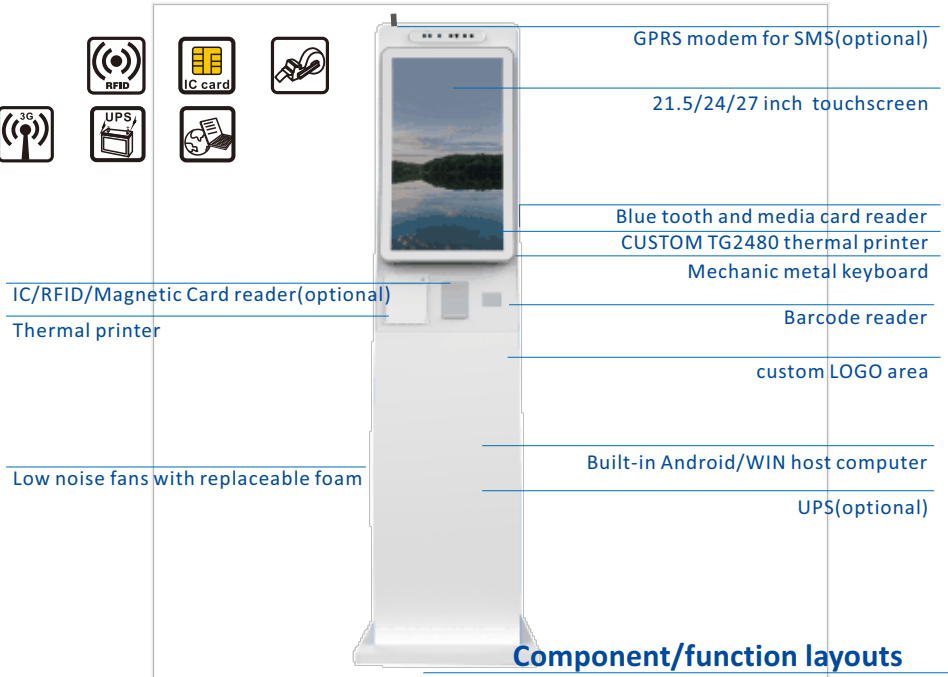

Specifcations

Model Name	H1C-24M-Y
Processor	Intel® Celeron™ J6410
RAM	4Gb DDR III(16G max)
HDD	60G SSD or 500G 7200rpm 3.5" hard driver
FLASH	32G
Monitor	24" LCD with DX9 decoding acceleration
Touchscreen	Water proof curved touchscreen
RFID reader	R3 mifare RFID reader
Ticket printer	Thermal printer, thickness:80-120g/m2(optional)
Metal keyboard	Optional metal keyboard with trackball
Media storage card reader	Optional
Blue tooth reader	(None)
Credit/Debit card R’	Dip card reader(optional)
Barcode reader	2D barcode Reader
GPRS Modem	dual band SMS/LTE modem
UPS	UPS for at least 5 mins of power
Audio	Bi-stereo channel 2X5W speakers
Enclosure	Durable all-steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate with drawers Security lock with crossbars Moistureproof,Antirust,Anti-acid,Static free Dimensions: 45-56cm * 45-56cm * 152-183cm
Rear I/O Connectors	Power Jack Fuse(3A) Main power switch Host PC Power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45
Fans	110 or 220 V AC selective Operation noise level: <45dB
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A
Operating System	XP, WIN 7, WinCE, XPe, WES, Linux2.6, Ubuntu9, Fedora10
Operating Temperature	0°C up to 45°C(need heater in below 0°C environment)
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)

