
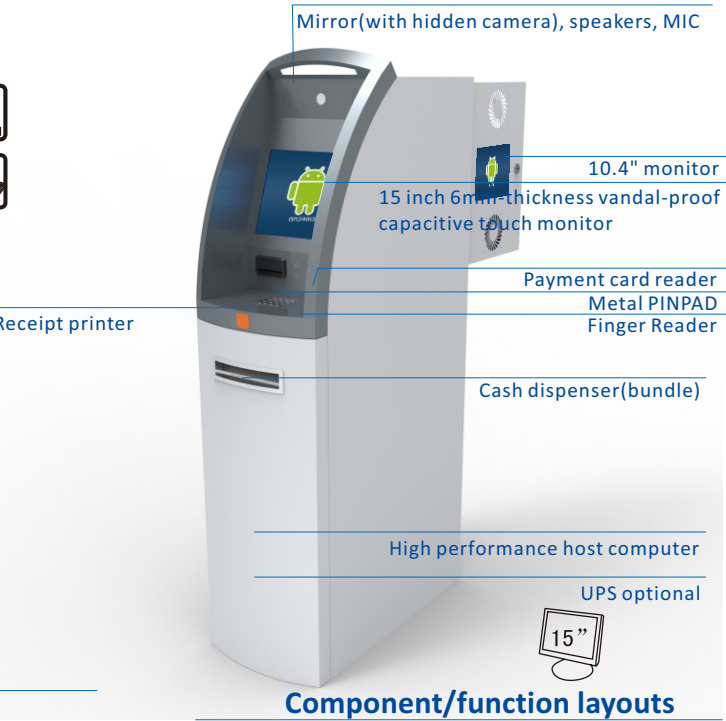

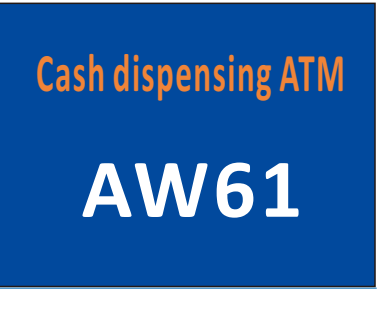




Applications

- Bank ATM payment system
- Payroll ATM machine
- Card payment terminal
- Cash bank machine

Features

- Fanless industrial computer
- Vandal-proof 6mm-thickness touch
- High speed thermal ticket printer;
- Fast cash dispenser with shutter;
- Dual color journal dot-matrix printer;
- 12mm Q345 UL291/CEN chassis/safe
- All steel sleek anti graffiti enclosure

A4 laser printer	HP LaserJet1008 laser printer
------------------	-------------------------------

RFID reader	ZKTEK R3
Ticket printer	ZKTEK P58C thermal printer, thickness:80-110g/m2(optional)
Credit/Debit card R'	ZKTEK R1
EPP metal keypad(optional)	

GPRS Modem	Simemse MC55 GPRS dual band SMS modem
UPS	SANTAK K500 PRO UPS for at least 5 mins of power
Audio	Bi-stereo channel 2X10W speakers

Barcode reader	HONEYWELL® 4823F 1D Laser Reader (None)
----------------	---

Specifications	
Model Name	AW61G-N100
Processor	Intel Core Duo
RAM	DDR4X 8GB
HDD	128GB SSD Up to 3T size
Monitor	15" LCD with DX9/12 decoding acceleration
Touchscreen	Water proof Capacitive touchscreen
Receipt printer	80mm thermal printer, thickness:80-120g/m2(optional)
Payment card reader	EMV 4.0 cerficated motorized AT24C....IC, magnetic and RFID card reader
Journal printer	9pin stylus impact dual color printer Mp912
Metal PINPAD	PCI 5.0 certificated ZKTEK MKP2920SEA
Cash dispenser	NMD100 friction cash dispenser module with 7-10mm UL291 safe
Biometric reader	Fingerprint or Finger-veinreader
UPS	Optional
Audio	Bi-stereo channel 2X3W speakers
Enclosure	Durable all-steel anti graffiti coating washable with agent Very low noise ventilation system, running noise<45dB Ergonomically sleek and smart design Easy to install and operate with drawers Safe with security lock and handle Moistureproof,Antirust,Anti-acid,Static free Dimensions: 40cm *80cm * 170cm
Rear I/O Connectors	Power Jack Fuse(3A) Main power switch Host PC Power-on switch 1 COM 2 USB2.0 1 GbE LAN RJ45
Fans	110 or 220 V AC selective Operation noise level: <45dB
Power consumption	110V AC or 220V AC(with fans) 50-60Hz 3A
Operating System	Android 10/14
Operating Temperature	0°C up to 45°C(need heater in below 0°C environment)
Operating Humidity	0% ~ 95% (relative humidity; non-condensing)

CE UL291

